

TH 25**KARGOTH**

CE ISO9001 ISO14001

STANDARD EQUIPMENTS**Engine**

Rated capacity	2500 kg with load center at 500mm
Manufacturer / type	ISUZU / C240PKJ
Energy / capacity	Diesel / 2,37 L
Rated output	34.5 Kw / 2500tr/mn
Rated torque	139 Nm / 1800 tr/mn
Transmission	TCM Converter

Specifications

Travel speed (no load / full load)	19/18.5 Km/h
Lift speed (no load / full load)	0.51/0.45m/s
Turning radius	2240 mm
Max. gradeability	20%
Mast tilt angle	6/12 deg
Operational weight	3880 kg
Front tires	7.00-12-12PR
Rear tires	6.00-9-10PR
Front wheel clearance	970 mm
Rear wheel clearance	970 mm
Wheelbase	1600 mm
Overall length	2580 mm
Overall width (wheel width)	1150 mm
Overhead guard height	2060 mm
Fork size	1070 mm

Driving station

Hydrostatic power steering	
Ergonomical levers	
Numerical hourmeter	
Permanent fuel gauge	
Engine oil pressure warning light	
Alternator charge warning light	
Tilt steering column	
Kargo suspension seat with back rest adjustment and seat belt	
Amenity tray	
Handbrake	
Rear lighting	
2 front working lamps	
Engine hood assisted opening	
Easy access handle to the driving station	
Double filtration	

**Performance**

Industrial engine designed and manufactured by
Easy maintenance

ISUZU


TH 25

KARGOTH



CE ISO9001 ISO14001

DIAGRAMS

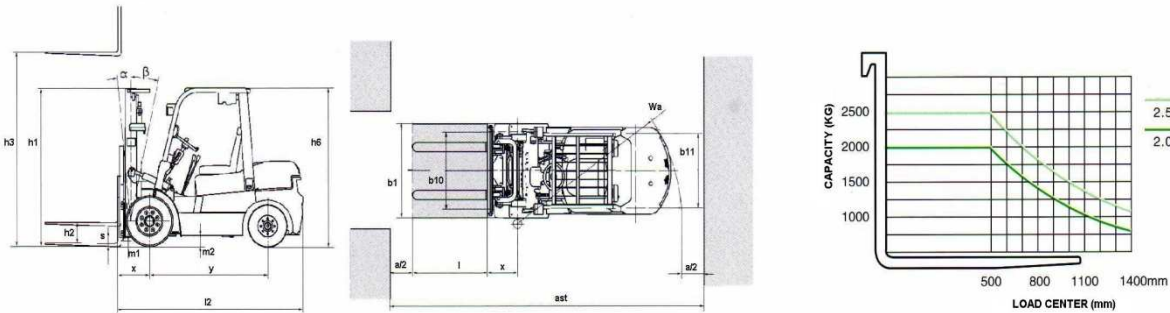

Available mast for KARGO TH25

		Lift height	Mast lowered height	Free lift height	Mast extended height
DOUBLE MAST	full mast	VM300 : 3000mm	2022mm	330mm	3575mm
		VM330 : 3300mm	2172mm	330mm	3875mm
		VM350 : 3500mm	2272mm	330mm	4075mm
		VM400 : 4000mm	2572mm	330mm	4575mm
		VM450 : 4500mm	2822mm	330mm	5075mm
		VM500 : 5000mm	3072mm	330mm	5575mm
		VM550 : 5500mm	3372mm	330mm	6075mm
		VM600 : 6000mm	3622mm	330mm	6575mm
DOUBLE MAST	full free mast	VFM300 : 3000mm	2060mm	1515mm	3569mm
		VFM330 : 3300mm	2210mm	1665mm	3869mm
		VFM350 : 3500mm	2310mm	1765mm	4069mm
		VFM400 : 4000mm	2610mm	2065mm	4569mm
TRIPLE MAST	full free mast	VFHM400 : 4000mm	1985mm	1370mm	4579mm
		VFHM435 : 4350mm	2110mm	1496mm	4929mm
		VFHM450 : 4500mm	2160mm	1544mm	5077mm
		VFHM480 : 4800mm	2260mm	1715mm	5469mm
		VFHM500 : 5000mm	2360mm	1744mm	5577mm
		VFHM540 : 5400mm	2485mm	1874mm	5983mm
		VFHM600 : 6000mm	2710mm	2094mm	6579mm

Others masts are available, contact us.

* Mast extended height + 455mm if equipped with backrest