


KARGO^{TH®}

CE ISO9001

TH 70

EQUIPEMENT STANDARD MACHINE

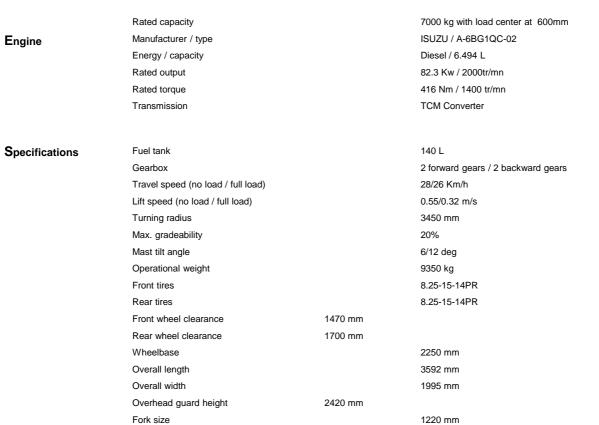

Driving station



Hydrostatic power steering Ergonomical levers Numerical hourmeter Permanent fuel gauge Engine oil pressure warning light Alternator charge warning light Tilt steering column Kargo suspension seat with back rest adjustment and seat belt Amenity tray Handbrake Rear lighting 2 front working lamps Engine hood assisted opening Easy access handle to the driving station





ISUZU

Performances

Industrial engine designed and manufactured by Easy maintenance

This document is not contractual. KARGO SAS reserves the right to bring any modification without prior notice.










C€ ISO9001

DIAGRAMS







A vaila	ble mast for KAR	GO TH70		
H	Lift height	Mast lowered height	Free lift height	Mast extended height
DOUBLE MAST full mast	VM300: 3000mm	2500mm	150mm	3975mm
	VM330: 3300mm	2650mm	150mm	4275mm
	VM350:3500mm	2750mm	150mm	4475mm
	VM400:4000mm	3050mm	150mm	4975mm
	VM450:4500mm	3300mm	150mm	5475mm
	VM500:5000mm	3550mm	150mm	5975mm
	VM550:5500mm	3850mm	150mm	6475mm
	VM600:6000mm	4100mm	150mm	6975mm
MAST	Lift height	Mast lowered height	Free lift height	Mast extended height
TRIPLE M	VFHM450:4500mm	2655mm	1741mm	5475mm
	VFHM480:4800mm	2760mm	1845mm	5775mm
	VFHM500: 5000mm	2825mm	1915mm	5975mm
	VFHM550:5500mm	2960mm	2045mm	6375mm
	VFHM600:6000mm	3160mm	2245mm	6975mm

* Mast extended height + 454mm if equiped with backrest