

TH 80**KARGOTH**

CE ISO9001 ISO14001

STANDARD EQUIPMENTS**Engine**

Rated capacity	8000 kg with load center at 600mm
Manufacturer / type	ISUZU / A-6BG1QC-02
Energy / capacity	Diesel / 6.494 L
Rated output	82.3 Kw / 2000tr/mn
Rated torque	416 Nm / 1400 tr/mn
Transmission	TCM Converter

Specifications

Fuel tank	140 L
Gearbox	2 forward gears / 2 backward gears
Travel speed (no load / full load)	28/24 Km/h
Lift speed (no load / full load)	0.41/0.35 m/s
Turning radius	3700 mm
Max. gradeability	20%
Mast tilt angle	6/12 deg
Operational weight	11080 kg
Front tires	9.00-20-14PR
Rear tires	9.00-20-14PR
Front wheel clearance	1600 mm
Rear wheel clearance	1700 mm
Wheelbase	2500 mm
Overall length	3940 mm
Overall width	2245 mm
Overhead guard height	2565 mm
Fork size	1220 mm

Driving station

Hydrostatic power steering
Ergonomical levers
Numerical hourmeter
Permanent fuel gauge
Engine oil pressure warning light
Alternator charge warning light
Tilt steering column
Kargo suspension seat with back rest adjustment and seat belt
Amenity tray
Handbrake
Rear lighting
2 front working lamps
Engine hood assisted opening
Easy access handle to the driving station


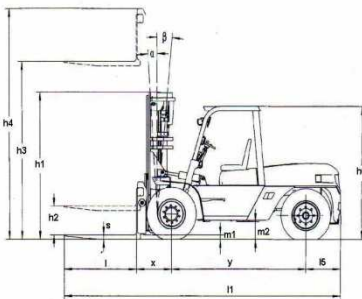
**Performances**

Industrial engine designed and manufactured by
Powerful disc brake
Easy maintenance

ISUZU

TH 80**KARGOTH**

CE ISO9001 ISO14001

DIAGRAMS**Available mast for KARGO TH80**

	Lift height	Mast lowered height	Free lift height	Mast extended height
DOUBLE MAST full mast	VM300 : mât 3000mm	2695mm	200mm	4139mm
	VM325 : mât 3250mm	2820mm	200mm	4264mm
	VM330 : mât 3300mm	2845mm	200mm	4289mm
	VM350 : mât 3500mm	2945mm	200mm	4389mm
	VM375 : mât 3750mm	3070mm	200mm	4514mm
	VM400 : mât 4000mm	3245mm	200mm	4689mm
	VM425 : mât 4250mm	3370mm	200mm	4814mm
	VM450 : mât 4500mm	3495mm	200mm	4939mm
	VM475 : mât 4750mm	3620mm	200mm	5064mm
	VM500 : mât 5000mm	3745mm	200mm	5189mm
	VM550 : mât 5500mm	4045mm	200mm	5489mm
	VM600 : mât 6000mm	4295mm	200mm	5739mm

Others masts are available, contact us.