

**GH 30****KARGO<sup>GH</sup>**

CE ISO9001 ISO14001

**STANDARD EQUIPMENTS****Engine**

Rated capacity	3000 kg with load center at 500mm
Manufacturer / type	MITSUBISHI / 4G64
Energy / capacity	L P G & Gasoline / 2.35 L
Rated output	37 Kw/ 2500 rpm
Rated torque	161 Nm / 1600 rpm
Transmission	Converter TCM

**Specifications**

Travel speed (no load / full load)	19/18 Km/h
Lift speed (no load / full load)	0.46/0.40m/s
Turning radius	2460 mm
Max. gradeability	18%
Operational weight	4380 kg
Front tires	28x9-15-14PR
Rear tires	6.50-10-10PR
Front wheel clearance	1000 mm
Rear wheel clearance	970 mm
Wheelbase	1700 mm
Overall length	2720 mm
Overall width	1225 mm
Overhead guard height	2090 mm
Fork size	1070 mm

**Driving station**

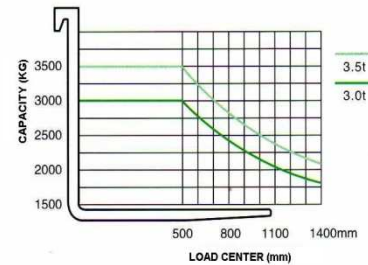
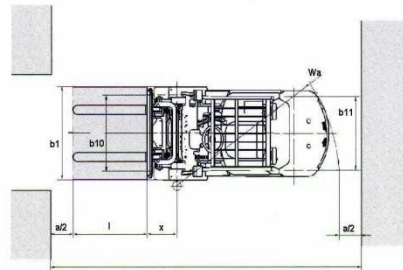
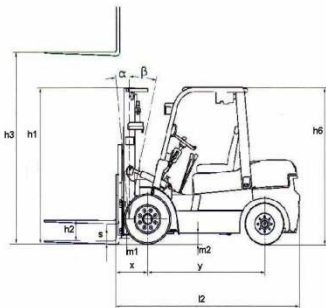
Hydrostatic power steering
Ergonomical levers
Numerical hourmeter
Engine oil pressure warning light
Alternator charge warning light
Tilt steering column
Kargo suspension seat with back rest adjustment and seat belt
Amenity tray
Handbrake
Rear lighting
2 front working lamps
Engine hood assisted opening
Easy access handle to the driving station
Double filtration

**Performance**

Industrial engine designed and manufactured by <b>MITSUBISHI</b>
Easy maintenance

**GH 30****KARGO<sup>GH</sup>**

CE ISO9001 ISO14001

**DIAGRAMS**

*Available mast for KARGO GH30*

		Lift height	Mast lowered height	Free lift height	Mast extended height
<b>DOUBLE MAST</b>	full mast	VM300 : 3000mm	2080mm	300mm	3690mm
		VM330 : 3300mm	2230mm	300mm	3990mm
		VM350 : 3500mm	2330mm	300mm	4190mm
		VM400 : 4000mm	2630mm	300mm	4690mm
		VM450 : 4500mm	2880mm	300mm	5190mm
		VM500 : 5000mm	3130mm	300mm	5690mm
		VM550 : 5500mm	3430mm	300mm	6190mm
		VM600 : 6000mm	3680mm	300mm	6690mm
<b>DOUBLE MAST</b>	full free mast	VFM300 : 3000mm	2070mm	1415mm	3684mm
		VFM330 : 3300mm	2220mm	1565mm	3984mm
		VFM350 : 3500mm	2320mm	1665mm	4184mm
		VFM400 : 4000mm	2620mm	1965mm	4684mm
<b>TRIPLE MAST</b>	full free mast	VFHM400 : 4000mm	2005mm	1350mm	4694mm
		VFHM435 : 4350mm	2130mm	1475mm	5044mm
		VFHM450 : 4500mm	2180mm	1525mm	5192mm
		VFHM480 : 4800mm	2280mm	1625mm	5494mm
		VFHM500 : 5000mm	2380mm	1725mm	5692mm
		VFHM540 : 5400mm	2505mm	1850mm	6098mm
		VFHM600 : 6000mm	2730mm	2075mm	6694mm

\* Mast extended height + 557mm if equipped with backrest

Others masts are available, contact us.