

TH 10**KARGOTH**

CE ISO9001

STANDARD EQUIPMENTS**Engine**

Rated capacity	1000 kg with load center at 500mm
Manufacturer / type	ISUZU / C240PKJ
Energy / capacity	Diesel / 2,37 L
Rated output	34.5 Kw / 2500tr/mn
Rated torque	139 Nm / 1800 tr/mn
Transmission	TCM Converter

Specifications

Travel speed (no load / full load)	14.5/13.5 Km/h
Lift speed (no load / full load)	0.51/0.45 m/s
Turning radius	1890 mm
Max. gradeability	20%
Mast tilt angle	6/12 deg
Operational weight	2340 kg
Front tires	6.50-10-10PR
Rear tires	5.00-8-8PR
Front wheel clearance	890 mm
Rear wheel clearance	920 mm
Wheelbase	1400 mm
Overall length (without fork)	2180 mm
Overall width (wheel width)	1095 mm
Overhead guard height	2075 mm
Fork size	920 mm

Driving station

Hydrostatic power steering
Ergonomical levers
Numerical hourmeter
Permanent fuel gauge
Engine oil pressure warning light
Alternator charge warning light
Tilt steering column
Kargo suspension seat with back rest adjustment and seat belt
Amenity tray
Handbrake
Rear lighting
2 front working lamps
Engine hood assisted opening
Easy access handle to the driving station

**Performance**

Industrial engine designed and manufactured by
Easy maintenance

ISUZU



TH 10

KARGOTH



CE ISO9001

DIAGRAMS

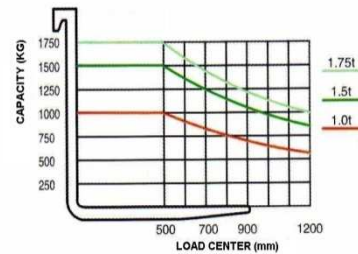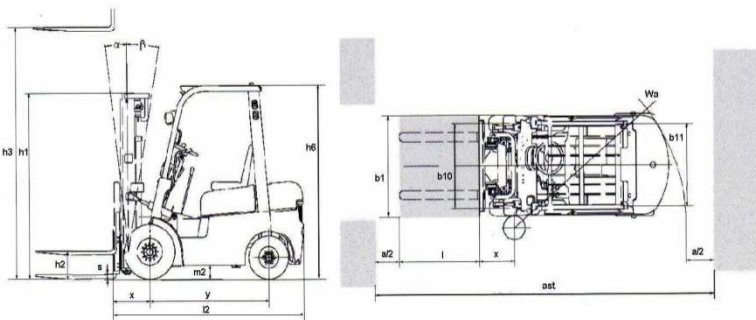

<i>Available mast for KARGO TH10</i>					
DOUBLE MAST	full mast	Lift height	Mast lowered height	Free lift height	Mast extended height
		VM300 : 3000mm	1996mm	164mm	3545mm
VM330 : 3300mm	2146mm	164mm	3845mm		
VM350 : 3500mm	2246mm	164mm	4045mm		
VM400 : 4000mm	2546mm	164mm	4545mm		
VM450 : 4500mm	2796mm	164mm	5045mm		
VM500 : 5000mm	3046mm	164mm	5545mm		
VM550 : 5500mm	3346mm	164mm	6045mm		
VM600 : 6000mm	3596mm	164mm	6545mm		
DOUBLE MAST	full free mast	Lift height	Mast lowered height	Free lift height	Mast extended height
		VFM300 : 3000mm	1996mm	1481mm	3555mm
VFM330 : 3300mm	2146mm	1631mm	3855mm		
VFM350 : 3500mm	2246mm	1731mm	4055mm		
VFM400 : 4000mm	2546mm	2031mm	4555mm		
TRIPLE MAST	full free mast	Lift height	Mast lowered height	Free lift height	Mast extended height
		VFHM400 : 4000mm	1930mm	1415mm	4545mm
VFHM435 : 4350mm	2055mm	1540mm	4895mm		
VFHM450 : 4500mm	2105mm	1590mm	5045mm		
VFHM480 : 4800mm	2205mm	1690mm	5345mm		
VFHM500 : 5000mm	2305mm	1790mm	5545mm		
VFHM540 : 5400mm	2430mm	1915mm	5945mm		
VFHM600 : 6000mm	2655mm	2140mm	6545mm		

Others masts are available, contact us.

* Mast extended height + 485mm if equipped with backrest