

TH 35**KARGOTH**

CE ISO9001 ISO14001

STANDARD EQUIPMENT**Engine**

Rated capacity	3500 kg with load center at 500mm
Manufacturer / type	ISUZU / 4JG2
Energy / capacity	Diesel / 3,059 L
Rated output	44.9 Kw / 2450tr/mn
Rated torque	186.3 Nm / 1800 tr/mn
Transmission	TCM Converter

Specifications

Travel speed (no load / full load)	19/17 Km/h
Lift speed (no load / full load)	0.42/0.36m/s
Turning radius	2540 mm
Max. gradeability	15%
Mast tilt angle	6/12 deg
Operational weight	4750 kg
Front tires	28x9-15-14PR
Rear tires	6.50-10-10PR
Front wheel clearance	1000 mm
Rear wheel clearance	970 mm
Wheelbase	1700 mm
Overall length	2720 mm
Overall width (wheel width)	1225 mm
Overhead guard height	2090 mm
Fork size	1070 mm

Driving station

Hydrostatic power steering
Ergonomical levers
Numerical hourmeter
Permanent fuel gauge
Engine oil pressure warning light
Alternator charge warning light
Tilt steering column
Kargo suspension seat with back rest adjustment and seat belt
Amenity tray
Handbrake
Rear lighting
2 front working lamps
Engine hood assisted opening
Easy access handle to the driving station
Double filtration

**Performance**

Industrial engine designed and manufactured by
Easy maintenance

ISUZU




TH 35

KARGOTH



CE ISO9001 ISO14001

DIAGRAMS

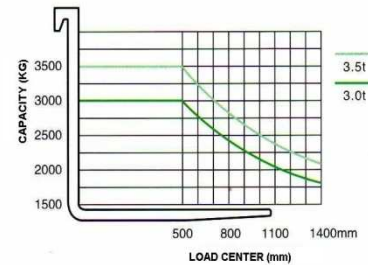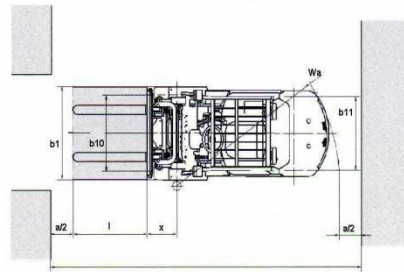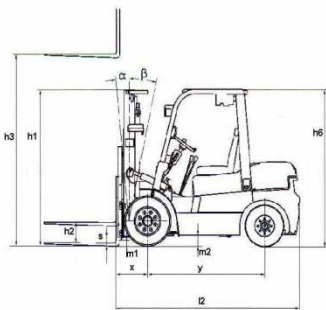

Available mast for KARGO TH35					
DOUBLE MAST	full mast	Lift height	Mast lowered height	Free lift height	Mast extended height
		VM300 : 3000mm	2080mm	300mm	3690mm
VM330 : 3300mm	2230mm	300mm	3990mm		
VM350 : 3500mm	2330mm	300mm	4190mm		
VM400 : 4000mm	2630mm	300mm	4690mm		
VM450 : 4500mm	2880mm	300mm	5190mm		
VM500 : 5000mm	3130mm	300mm	5690mm		
VM550 : 5500mm	3430mm	300mm	6190mm		
VM600 : 6000mm	3680mm	300mm	6690mm		
DOUBLE MAST	full free mast	Lift height	Mast lowered height	Free lift height	Mast extended height
		VFM300 : 3000mm	2070mm	1415mm	3684mm
VFM330 : 3300mm	2220mm	1565mm	3984mm		
VFM350 : 3500mm	2320mm	1665mm	4184mm		
VFM400 : 4000mm	2620mm	1965mm	4684mm		
TRIPLEX	full free mast	Lift height	Mast lowered height	Free lift height	Mast extended height
		VFHM400 : 4000mm	2005mm	1350mm	4694mm
VFHM435 : 4350mm	2130mm	1475mm	5044mm		
VFHM450 : 4500mm	2180mm	1525mm	5192mm		
VFHM480 : 4800mm	2280mm	1625mm	5494mm		
VFHM500 : 5000mm	2380mm	1725mm	5692mm		
VFHM540 : 5400mm	2505mm	1850mm	6098mm		
VFHM600 : 6000mm	2730mm	2075mm	6694mm		

Others masts are available, contact us.

* Mast extended height + 557mm if equipped with backrest